


START
HERE

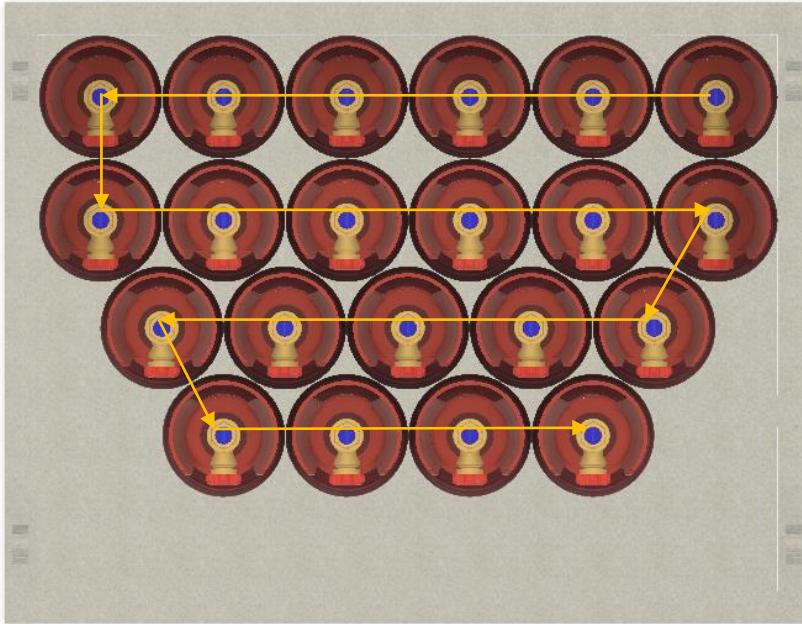

- Cylinders should be stacked as shown in diagram.
- First cylinder must be firmly against right and rear rails.
- Cylinder valves must be facing to the front of pallet.
- Excess strap must be tightly rolled and firmly secured between cylinder and strap gap.
- There must be no cylinder movement once strapped.
- Check and re-tension all pallets prior to loading them on trucks or containers

CORRECT

- ✓ Strap flat against cylinder
- ✓ Strap level
- ✓ Ratchet in lock position
- ✓ Strap secured
- ✓ Cylinder guard behind ratchet
- ✓ Correct strap height



INCORRECT

- ✗ Strap not level
- ✗ Ratchet not locked
- ✗ Strap not secured
- ✗ Ratchet not fastened on cylinder guard

POOR TECHNIQUE WILL LEAD TO LOSS OF CONTROL OF CYLINDERS



MINI/MID PALLET BEST PRACTICE



Always use top rung on Mini and Mid Pallets for D-size.

Note: When ratchet strap not used, loop around the lugs/outside bars and tighten to prevent damage.

FULL SIZE PALLET BEST PRACTICE



In absence of a bottom strap, loop around bar using bottom rung.